


## Technical Data KF

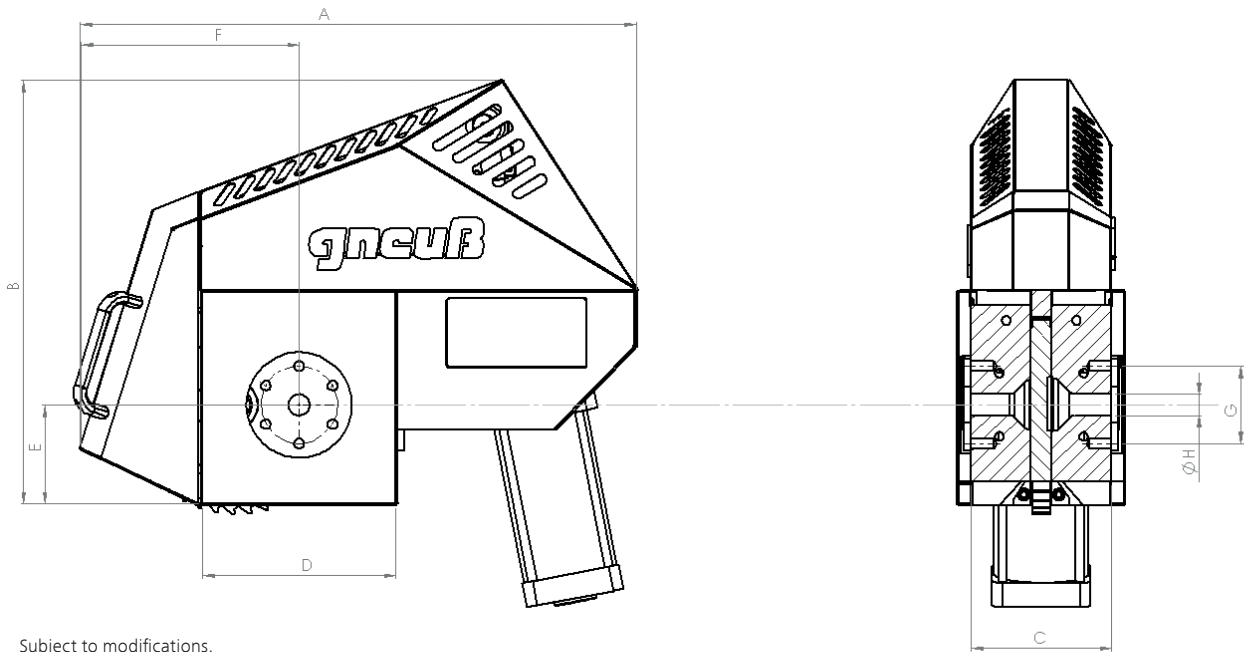

Subject to modifications.

filter type	screen area	heating capacity in watt	heater zones <sup>(1)</sup>	pressure in psi max. <sup>(2)</sup>	temp. in °F max. <sup>(3)</sup>	Q in lbs/h <sup>(4)</sup>	dimensions in inches								weight in lbs
							A	B	C	D	E	F	G	H <sup>(5)</sup>	
	active in in <sup>2</sup>	electric	electric												
<b>KF 45</b>	2,5	3900	2	7500	600	220	25.4	18.1	5.1	7.3	3.7	9.4	3.5	0.8	200
<b>KF 60</b>	4,3	4500	2	7500	600	440	33.3	20.7	5.7	9.4	4.7	10.4	4.3	0.8	250
<b>KF 75</b>	6,8	5100	2	7500	600	660	35.8	23.8	7.9	11.0	5.6	12.2	4.3	1.0	450
<b>KF 90</b>	10	10700	2	7500	600	1100	39.4	27.2	9.1	12.2	6.5	14,2	4.7	1.2	700
<b>KF 110</b>	15	12700	2	7500	600	1600	43.3	30.3	10.0	15.0	7.9	16.1	5.5	1.2	800
<b>KF 130</b>	21	13700	2	7500	600	2000	46.1	32.7	11.7	16.5	9.0	18.1	6.3	1.4	1100
<b>KF 150</b>	28	15700	3	7500	600	3000	48.8	37.8	13.0	17.9	11.2	20.9	6.3	1.4	1600
<b>KF 175</b>	37	17700	3	7500	600	4400	55.9	47.2	15.2	18.9	11.6	22.8	11.8	1.6	2400

(1) = 1 heater zone for liquid heating.

(2) = High pressure versions available as an option.

(3) = Up to 750 °F possible as an option.

(4) = Based on: MFI 2-5, filtration fineness 200 microns and differential pressure 725 psi.

(5) = The dimension „H“ can be freely chosen, the values given are maximum values.