


# MRSpure Extruder

## Technical Data

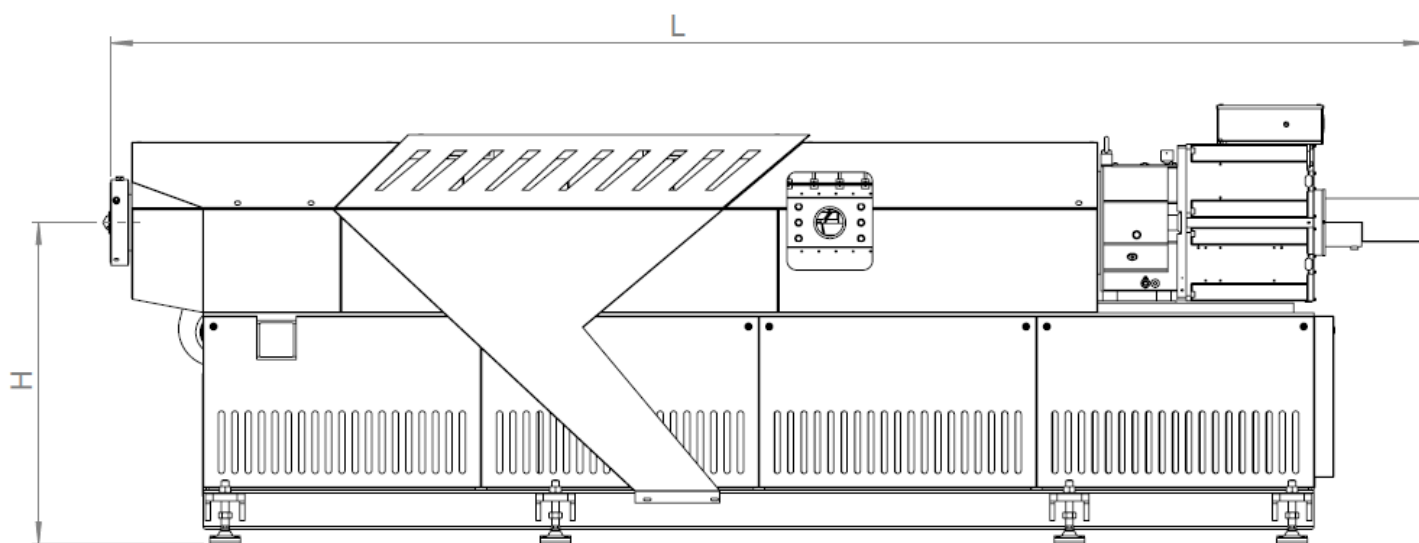

Subject to modifications.

	MRSpure 70	MRSpure 90	MRSpure 110	MRSpure 130	MRSpure 160	MRSpure 200
Screw diameter Ø mm	70	90	110	130	160	130
Drive rating kW	55	107	107	170	235	2x170
Max. screw speed (rpm)	210	165	165	150	120	150
Extrusion height H mm	1.150	1.150	1.300	1.300	1.450	1.450
Length L mm	4.100	4.600	5.100	5.600	6.800	6.300
Width B mm	1.200	1.490	1.520	1.560	1.685	2.670
Weight approx. kg	3.500	5.500	7.500	8.000	15.000	18.000
<b>Throughput rate in kg/h</b>						
PET	35	80	200	450	1.000	1.400
PP + PE	25	60	130	300	750	1.000
PA	28	70	160	360	880	1.200
PS	39	60	150	350	750	1.100

\* As each extruder is engineered to a specific project, the technical data may deviate from the values listed in this table. Detailed information on the relevant technical data is provided to you with your quotation.